

Visit smartHub

BE1310



Features

Easy setup

Plug in and connect. That's it.

Bluetooth® technology

Up to 33 yd. operating range

Battery backup

Steps in when the power goes out

System auto-reconnection

With a clear acknowledge signal

Scandinavian design

Discreet and functional

Connects your home to your hearing aids

The Visit smartHub is a wireless communications hub that connects your home to your hearing aids. It will help you to hear when the doorbell or phone rings, when your spouse needs you or if the smoke alarm goes off.

Compatible streamers and hearing aids

The smartHub requires separate monitors and works with the easyTek™ and miniTek™ streamer and specific wireless Siemens hearing aids. Your Hearing Care Professional will advise you on the compatible models.

How the smartHub works

When a Visit monitor is activated, the smartHub generates a sounding alert that is streamed directly to your hearing aids.

Welcome home signal

When you get home, the smartHub will automatically reconnect your hearing aids to the Visit monitors in your house.

Within minutes you will hear an acknowledge signal that tells you that the system is up and running.



Technical specifications




Size and weight

Height: **4.0", 100 mm**
 Width: **2.6", 65 mm**
 Depth: **1.1", 27 mm**
 Weight: **4.2 oz, 120 g incl. batteries**



Buttons and connectors

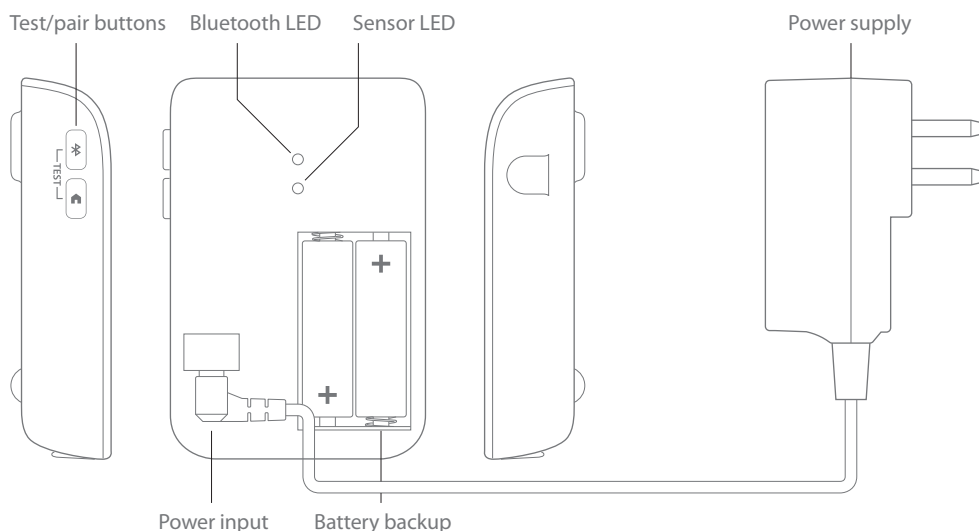

Compatibility

- The Visit smartHub supports the easyTek™ and miniTek™ streamer and specific wireless Siemens hearing aids. Your Hearing Care Professional will advise you on the compatible models

Frequency and coverage

- Bluetooth® frequency: 2400 – 2483.5 MHz
- Bluetooth® coverage: Up to 33 yd. (30 m)
Coverage can be reduced by thick walls and large objects.

Installation

- To ensure maximum Bluetooth® coverage, install the smartHub centrally in the premises, ideally in the room where you spend most of your time.

Environmental requirements

- For indoor use only.
- Temperature: 59° to 95° F (15°-35° C)
- Relative humidity: 5% -95% (non-condensing)

Power and batteries

- Power supply: 5.0 VDC, 300 mA
- Power consumption
Active < 50 mA, idle position < 6 mA
- Battery backup
Battery type: 2 x 1.5 V AA (LR6) lithium or alkaline
Operation time: At least 48 hours

Activation

- Via the test buttons or a Visit monitor

Maintenance and cleaning

- Maintenance free. Clean with a dry cloth.
- Do not use household cleaners, aerosol sprays, solvents, alcohol, ammonia, or abrasives.
- Not reusable.

Regulatory requirements

- Complies with the following requirements:
CE, FCC, RoHS, A-Tick, WEEE, Der Grüne punkt



In the box

- BE1310 Visit smartHub
- Power supply
- 2 x 1.5V AA alkaline batteries
- Velcro® for wall mounting
- Screw and plug
- User manual



Supported monitors

- BE1411 Visit Door monitor
- BE1431 Visit Telephone monitor
- BE1491 Visit Room/Baby monitor
- BE1240 Visit Push button
- BE1281 Visit Smoke alarm

© and TM 2015, Bellman & Symfon AB

Bellman and Bellman & Symfon are registered trademarks owned by Bellman & Symfon AB, all rights reserved. All product designs are patented. This leaflet is subject to change without prior notice.

BE1310_002DAS001_EN

bellman.com