

Visit Portable Receiver

BE1450-868



Features

Powerful sound

Adjustable up to 93 dB

Clear signal identification

Uses LEDs and sound signatures

Long lasting power

Up to 3 years battery life

Bed shaker outlet

For nighttime alerts

Easy setup

Works right out of the box

MD

CE-marked medical device
under EU MDR 2017/745

Keeps you in the loop.


The Portable Receiver from Bellman & Symfon is part of the Visit system that helps you to keep tabs on your home. It alerts you with lights and sounds when the doorbell or telephone rings, when your baby needs you or if a fire should occur.

The portable receiver requires no installation and is very easy to use. It's completely wireless so you can bring it out on the porch or balcony and has a battery life of up to three years.


Clear and distinct alerts

The portable receiver is capable of producing a sound signal of up to 93 dB and features a large, ergonomic dial that makes it easy to adjust the volume to your liking. It uses colored lights and individual sound signatures to differentiate the Visit signals.

Additionally, you can connect a bed shaker and wake up to vibrations if something should happen while you are asleep.

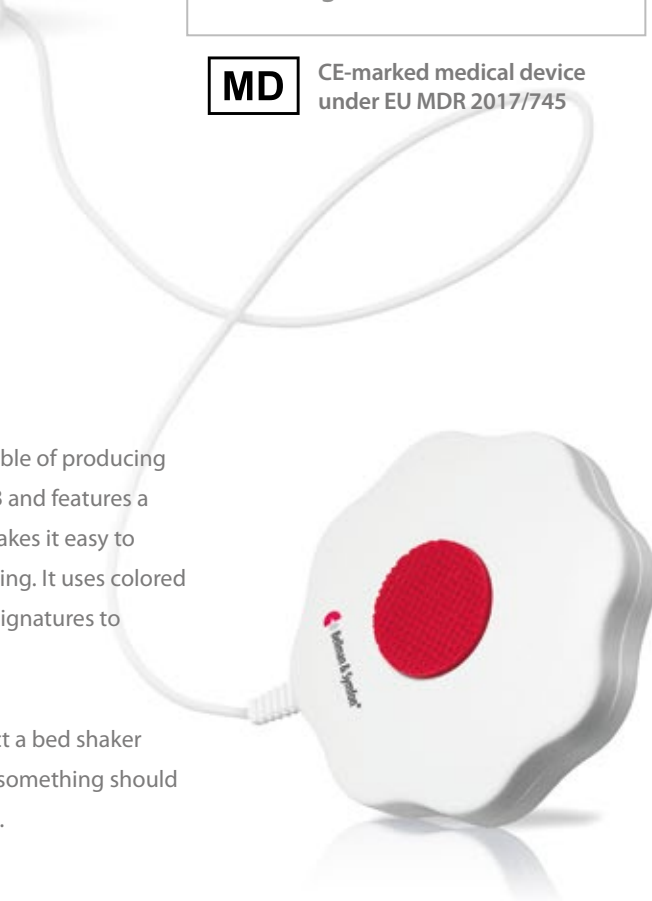


Technical specifications

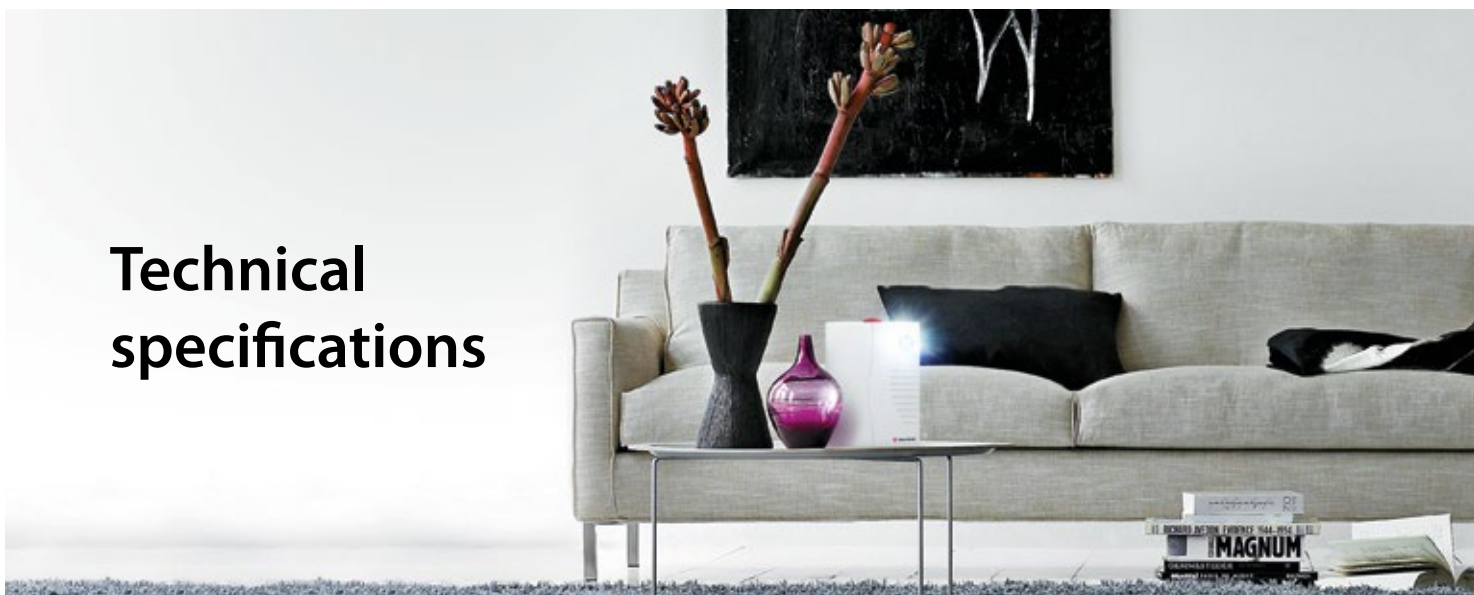


Dimensions and weight

Height	165 mm, 6.5"
Width	130 mm, 5.1"
Depth	36 mm, 1.4"
Weight	590 g, 20.8 oz. (incl. battery)

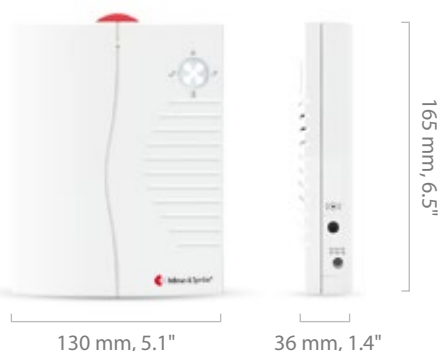

Buttons and controls

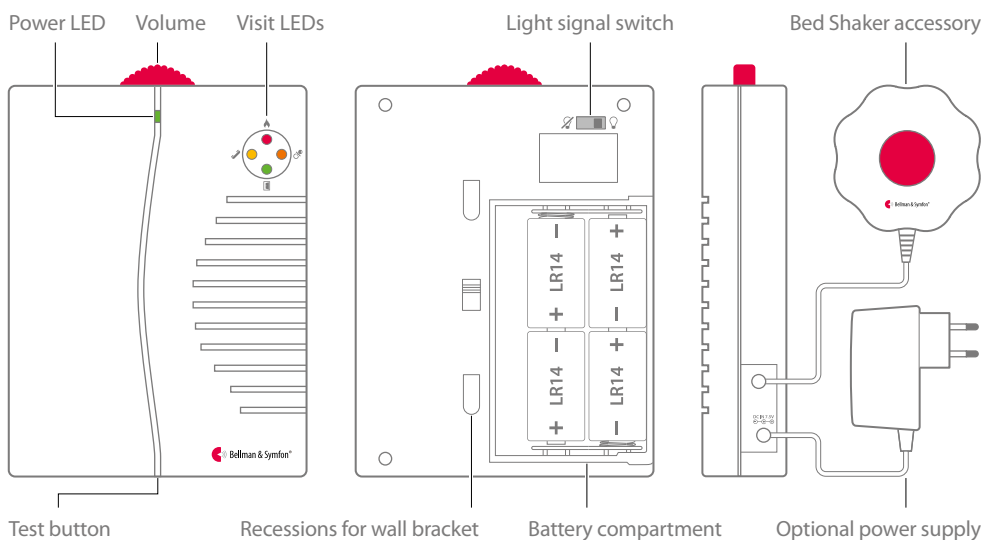

Features

- Adjustable sound signal
Max 93 dBA @ 1 m, frequency range: 500-1000 Hz
- Clear signal identification
Colored LEDs and individual sound signatures
- Long lasting power
Up to 3 years battery life
- Bed shaker voltage: 2.0 – 4.0 VDC

Frequency and coverage

- Radio frequency: 868.3 MHz,
- Coverage: Up to 250 meters, depending on the building's characteristics and the combination of transmitters and receivers.

Environmental requirements

- Operating temperature:
0 to 35° C, 32 to 95° F
- Relative humidity: 15% to 90%
(non condensing)

Power and battery

- Battery power
4×1.5V LR14 alkaline batteries
- Mains power
7.5 V DC / 1500 mA with optional power supply
- Power consumption
Active: 1000 mA, idle position: 0.1 mA
- Operating time
2 – 3 years with alkaline batteries

In the box

- BE1450-868 Portable Receiver
- 4×1.5V LR14 batteries
- Wall bracket with screws and plugs

Accessories

- BE1270-P02 Bed Shaker
- Power supply unit (EU)
- Power supply unit (UK)

Approvals



This product is a medical device in conformity with Regulation (EU) 2017/745 (Medical Device Regulation).

Visit indicators

The Visit LEDs normally indicates the following:

- Orange LED, pacifier symbol
The Baby Monitor is activated
- Green LED, door symbol
The Door Transmitter is activated
- Yellow LED, telephone symbol
The Telephone Transmitter is activated
- Red LED, fire symbol
The Smoke Alarm is activated
- Orange and Red LEDs blink alternately
The CO Alarm is activated

© 2025 Bellman & Symfon AB. All rights reserved.

Bellman, Bellman & Symfon and the Bellman & Symfon logo are registered trademarks of Bellman & Symfon AB. This leaflet is subject to change without prior notice.

BE1450-868_001DSH1.0_EN

bellman.com