


Bed shaker

Connections

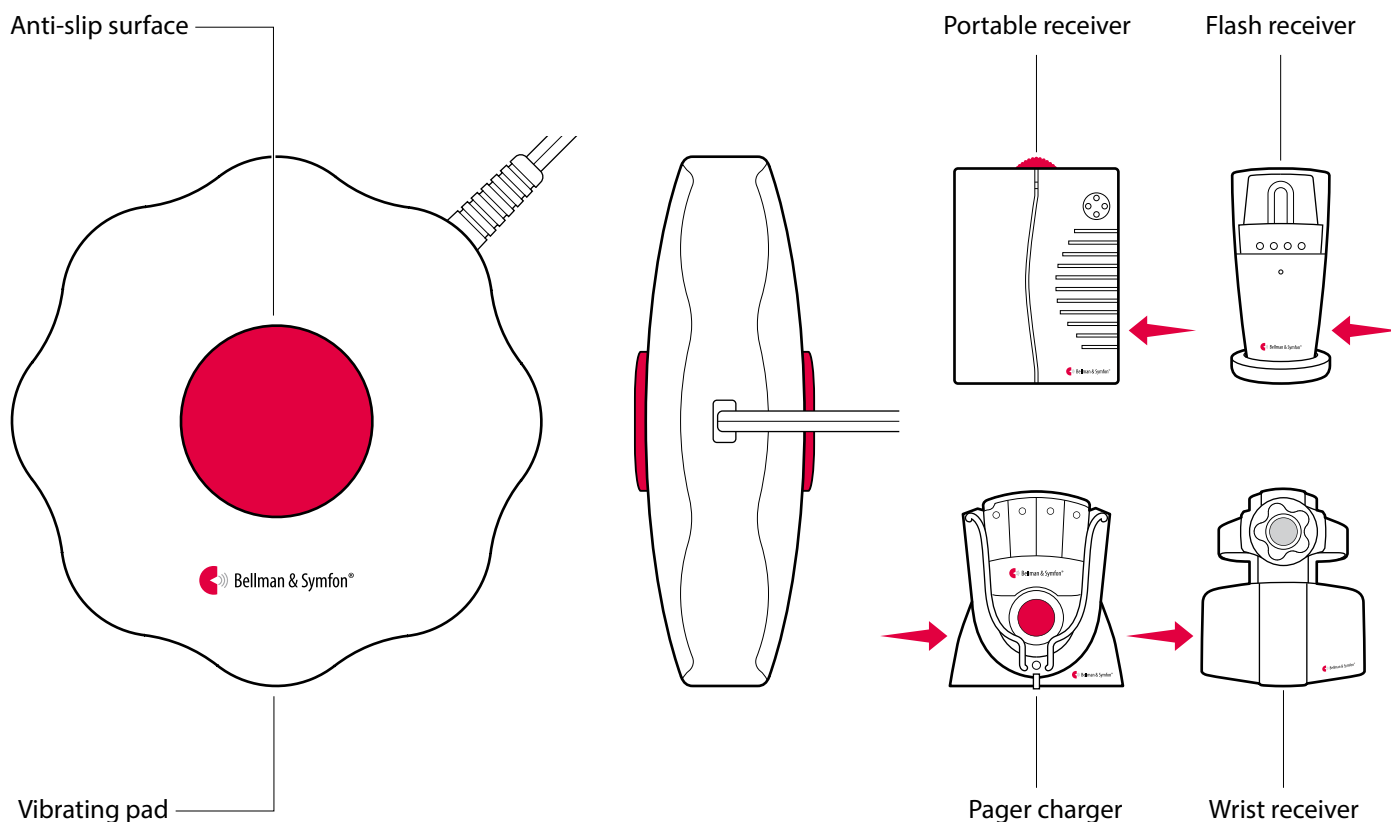

Technical specifications

Function

Wakes you with vibrations under the pillow or mattress. Requires no internal battery and connects to all Visit receivers, charger accessories and stand alone alarm clocks.

In the box

- BE1270 bed shaker

Power consumption

- Operating voltage
2.0 – 4.0 V DC from a Visit receiver
- Power consumption
250 – 750 mA

Cables and connectors

- Cable length: 2 m, 6.5'
- Connector: 3.5 mm mono jack plug

Dimensions and weight

- Height: 88 mm, 3.5"
- Width: 88 mm, 3.5"
- Depth: 27 mm, 1.1"
- Weight: 120 g, 4.2 oz.

Environmental requirements

- For indoor use only
- Temperature: 0° to 35° C, 32° to 95° F
- Relative humidity: 15% - 90%, non-condensing

Maintenance and care

- Clean with a dry cloth
- Do not use household cleaners, aerosol sprays, solvents, alcohol, ammonia, or abrasives

Compatibility

The bed shaker can be connected to the following products and accessories:

- BE1260 Pager charger accessory for the BE1470 Visit pager receiver
- BE1350 Alarm clock classic
- BE1370 Alarm clock pro
- BE1441 Visit flash receiver
- BE1442 Visit flash receiver with battery backup
- BE1450 Visit portable receiver
- BE1570 Visit wrist receiver charger
- BE1580 Visit alarm clock