

Wakes you with vibrations under the pillow or mattress.

The Bed Shaker from Bellman & Symfon is powerful enough to wake even the heaviest sleeper. Just place it under your mattress or pillow and plug it into your Bellman & Symfon receiver or desktop charger.

The Bed Shaker produces strong vibrations and requires no internal batteries. It features an anti-slip surface that holds it in place when it vibrates and is equipped with a long cable so you can place it anywhere you want.






Dimensions and weight

Height: 88 mm, 3.5" Width: 88 mm, 3.5" Depth: 27 mm, 1.1" Weight: **120** g, **4.2** oz.



Connections

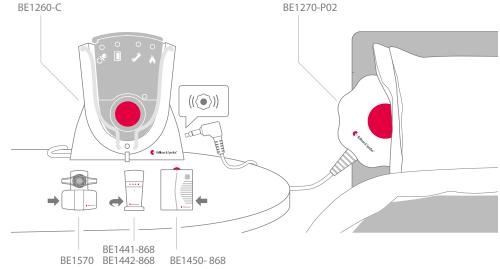

Compability

The bed shaker can be connected to the following products:

Visit Receivers

- BE1441-868 Visit Flash Receiver
- BE1442-868 Visit Flash Receiver with battery backup
- BE1450-868 Visit Portable Receiver
- BE1380/BE1580-868 Visit Alarm Clock

Visit Accessories

- BE1260-C Pager Charger accessory for the BE1470-868 Visit Pager Receiver
- BE1570 Visit Wrist Receiver Charger for the BE1560 Wrist Receiver

Alarm Clocks

- BE1350 Alarm Clock Classic (no longer available)
- BE1370-C Alarm Clock Pro

Approvals

MD This product is a medical device in conformity with Regulation (EU) 2017/745 (Medical Device Regulation).

Power consumption

- Operating voltage 2.0 - 4.0 V DC from a Visit receiver
- Power consumption 250 – 750 mA

Cables and connectors

- Cable length: 2 m, 6.5'
- Connector: 3.5 mm mono

Maintenance and cleaning

- Maintenance free. Clean with a dry cloth.
- Do not use household cleaners, aerosol sprays, solvents, alcohol, ammonia, or abrasives.
- Not reusable.

Environmental requirements

- For indoor use only
- Temperature: 0° to 35° C, 32° to 95° F
- Relative humidity: 15% to 90% (non condensing)

In the box

- BE1270-P02 Bed Shaker
- User Manual



© 2025 Bellman & Symfon AB. All rights reserved.

Bellman, Bellman & Symfon and the Bellman & Symfon logo are registered trademarks of Bellman & Symfon AB. This leaflet is subject to change without prior notice.

BE1270-P02_001DSH1.0-EN

bellman.com