

# Bed shaker

BE1270



 Bellman & Symfon®



## Features

**Powerful vibrations**  
Wakes even heavy sleepers

**Anti-slip surface**  
Stays in place when it vibrates

**Safe to use**  
Operates at low voltage

**Long cable, 2 m**  
Easy to place where you want it

**Visit compatible**  
Works with the Visit receivers

## Wakes you with vibrations under the pillow or mattress.

The bed shaker from Bellman & Symfon is powerful enough to wake even the heaviest sleeper. Just place it under your mattress or pillow and plug it into your Bellman & Symfon receiver or desktop charger.

The bed shaker produces strong vibrations and requires no internal batteries. It features an anti-slip surface that holds it in place when it vibrates and is equipped with a long cable so you can place it anywhere you want.


### Connections

The bed shaker can be connected to the following receivers and accessories:

- BE1441 Visit flash receiver
- BE1442 Visit flash receiver with battery backup
- BE1443 Visit flash receiver with battery backup and smoke detector supervision
- BE1450 Visit portable receiver
- BE1570 Visit wrist receiver charger
- BE1260 Visit pager charger accessory



# Technical specifications

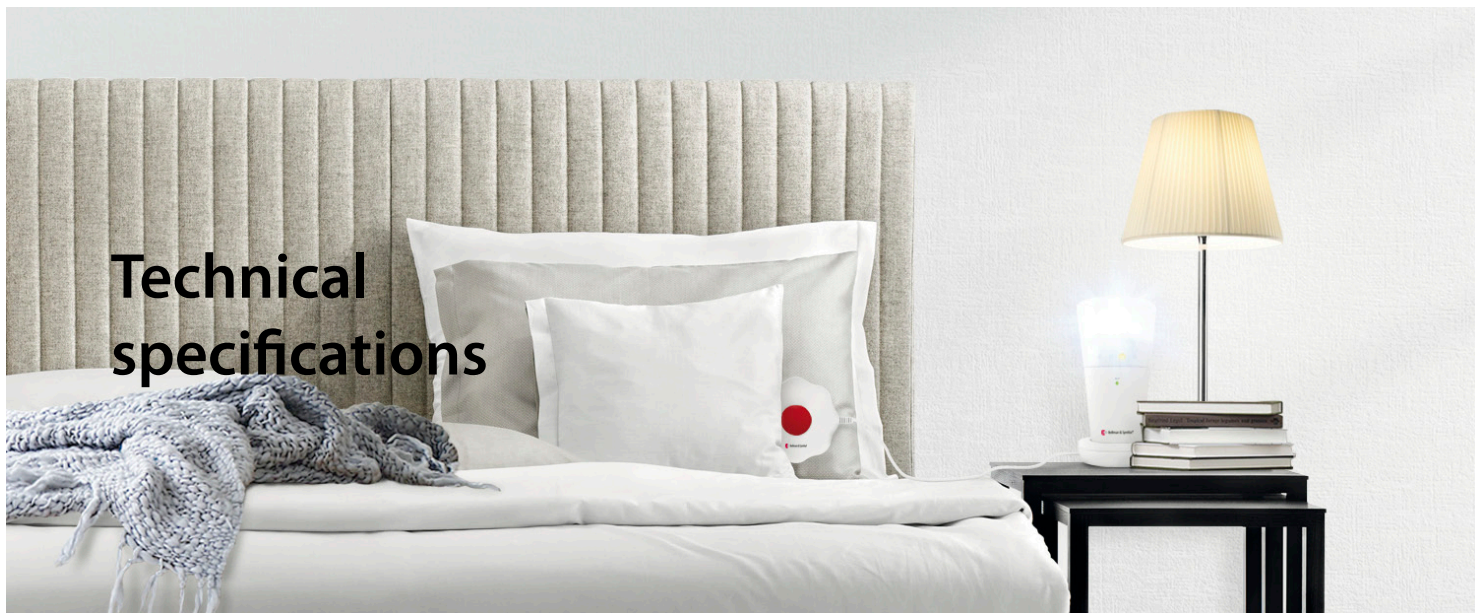


## Dimensions and weight

Height: 88 mm, 3.5"


Width: 88 mm, 3.5"

Depth: 27 mm, 1.1"

Weight: 120 g, 4.2 oz.

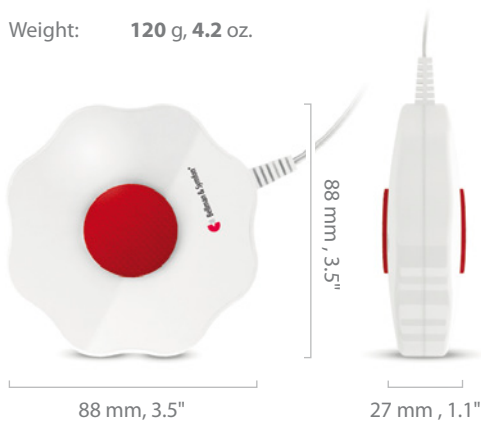

## Connections

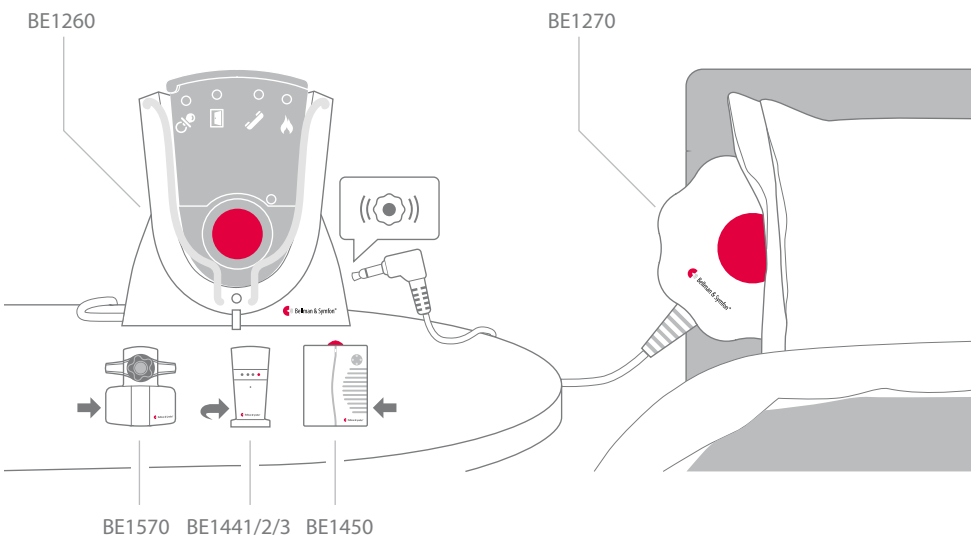

## Compatibility

The bed shaker can be connected to the following Visit receivers and charger accessories:

### Visit receivers

- BE1441 Visit flash receiver
- BE1442 Visit flash receiver with battery backup
- BE1443 Visit flash receiver with battery backup and advanced smoke detector supervision
- BE1450 Visit portable receiver
- BE1570 Visit wrist receiver charger

### Accessories

- BE1260 Pager charger accessory for the BE1470 Visit pager receiver

## Power consumption

- Operating voltage 2.0 – 4.0 V DC from a Visit receiver
- Power consumption 250 – 750 mA

## Cables and connectors

- Cable length: 2 m, 6.5'
- Connector: 3.5 mm mono

## Maintenance and cleaning

- Maintenance free. Clean with a dry cloth.
- Do not use household cleaners, aerosol sprays, solvents, alcohol, ammonia, or abrasives.
- Not reusable.

## Regulatory requirements

- Complies with the following requirements: CE, FCC, RoHS, RCM, WEEE, Der Grüne punkt



## In the box

- BE1270 bed shaker with a 2 m cable
- User manual
- Getting started guide



## Environmental requirements

- For indoor use only
- Temperature: 59° to 95° F (15°-35° C)
- Relative humidity: 5% -95% (non condensing)

© 2016 Bellman & Symfon AB. All rights reserved.

Bellman, Bellman & Symfon and the Bellman & Symfon logo are registered trademarks of Bellman & Symfon AB. This leaflet is subject to change without prior notice.

BE1270\_001DAS002

[bellman.com](http://bellman.com)